



## DMX 512 D4-CX 4-Channel Constant Voltage DMX512 & RDM Decoder

|                  |                    |
|------------------|--------------------|
| Cena             | <b>1 323.35 Kč</b> |
| Dostupnost       | <b>Dostupný</b>    |
| Doba zásilky     | <b>14 dnů</b>      |
| Katalogové číslo | <b>2631</b>        |
| Výrobce          | <b>Mi.Light</b>    |

### Popis výrobku

**Product Name: 4-Channel Constant Voltage DMX512 & RDM Decoder**

Model No.: D4-CX

Input Voltage: DC12~24V

Output Current: 5A/Channel

Total Output Current: Max 20A

Input Signal: Dmx512, RDM

Occupy 4 DMX Address

Working Temp.: -20~60°C

## 4-channel constant voltage DMX512 & RDM decoder

Support RDM function | Optional dimming curve | PWM frequency is optional  
Multiple protection



## Accord with DMX512 standard protocol Support RDM function

Comply with DMX512, DMX512 (1990), DMX512-A, RDM V1.0  
(E1.20-2006 ESTA standard) International standard agreement



## Multi-protection for your easy use

- ☆ Automatically detect when power on
- ☆ Anti-reverse connection protection
- ☆ Short-circuit protection
- ☆ Over current protection and recover function


## PWM frequency is optional

PWM high frequency ( 2000Hz ) or  
low frequency( 500Hz ) optional




## 2 Dimming curves optional


Logarithmic dimming

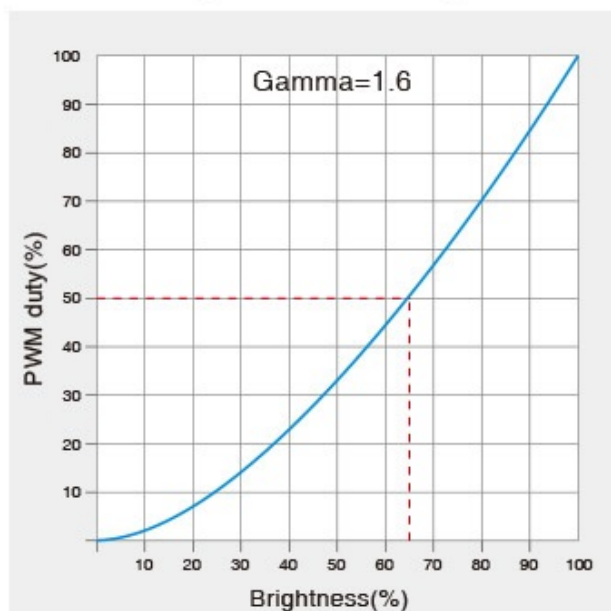

Linear dimming

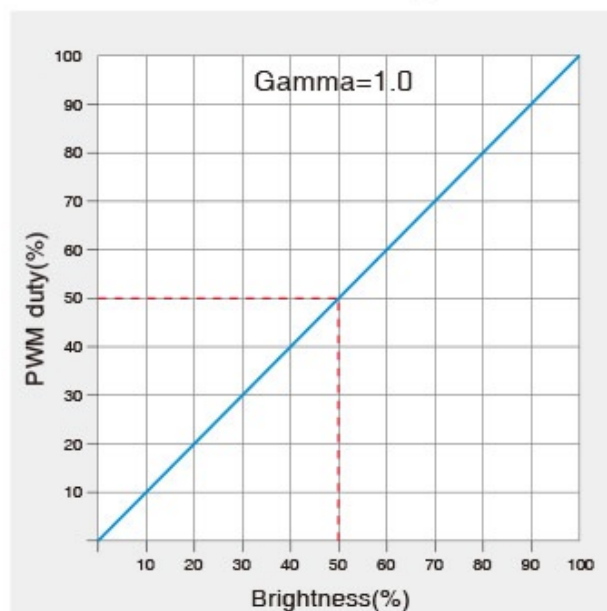


## Connection diagram

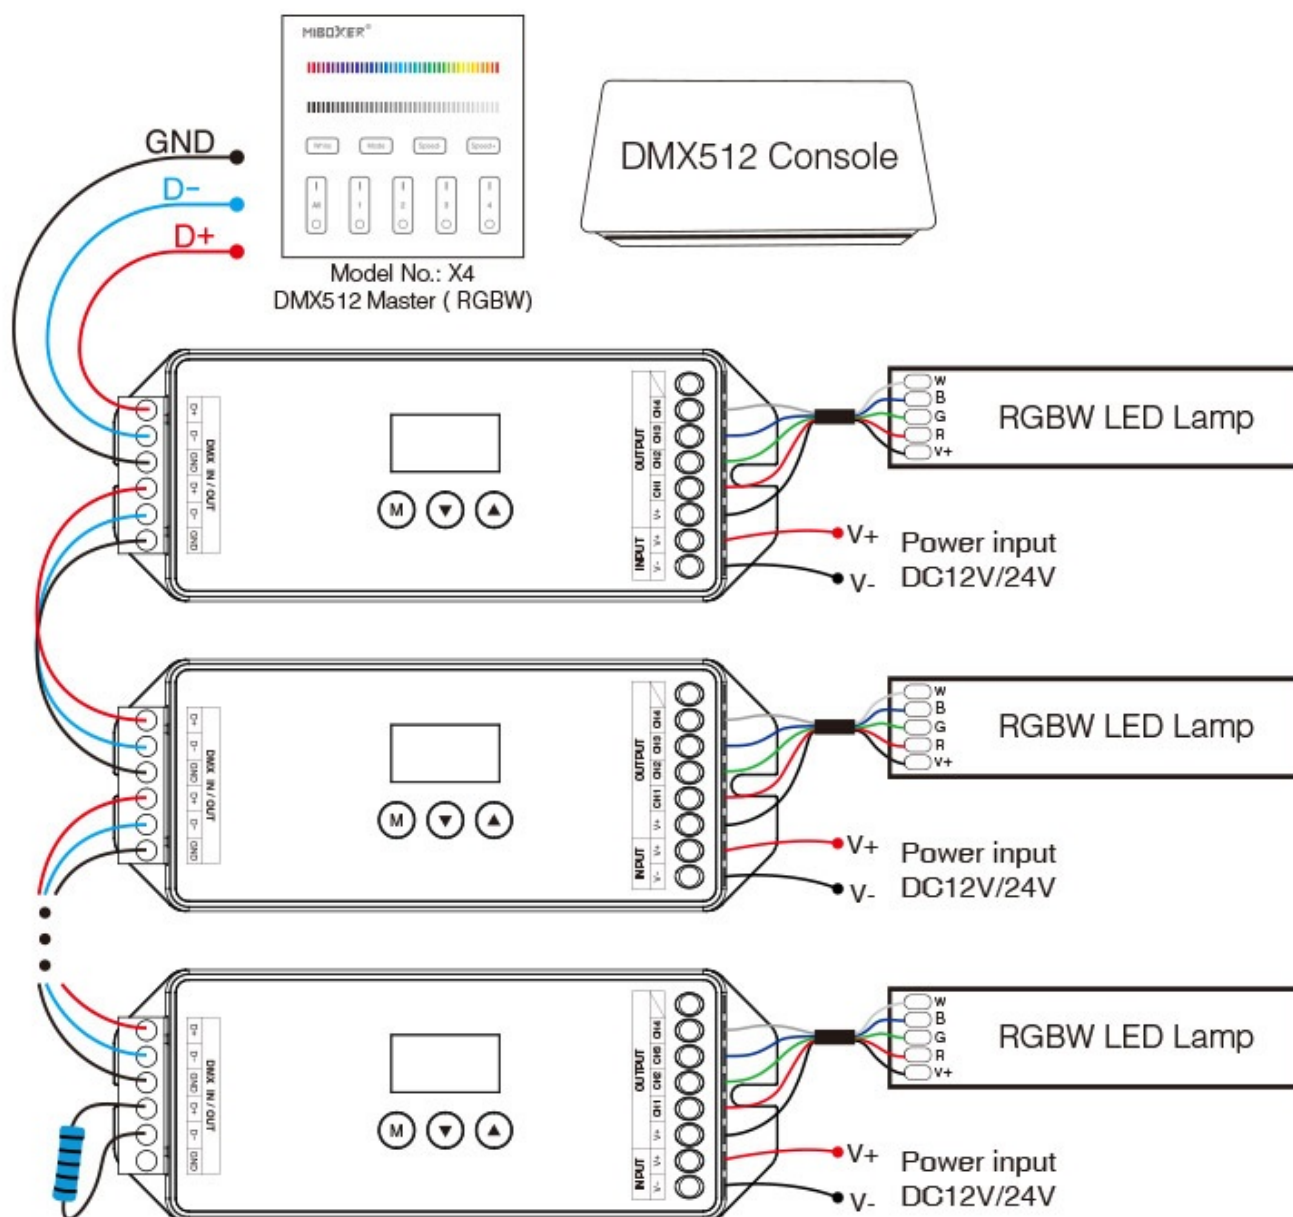

### Attention:

1. If the decoder is over 32pcs, or using the super long signal cable, you need DMX signal amplifier. Amplify signal cannot be over 5 times.
2. If there is overshoot effect due to the long signal cable or low quality circuit, please connect 0.25W 90-120 terminal resistance at the end of each DMX signal cable.

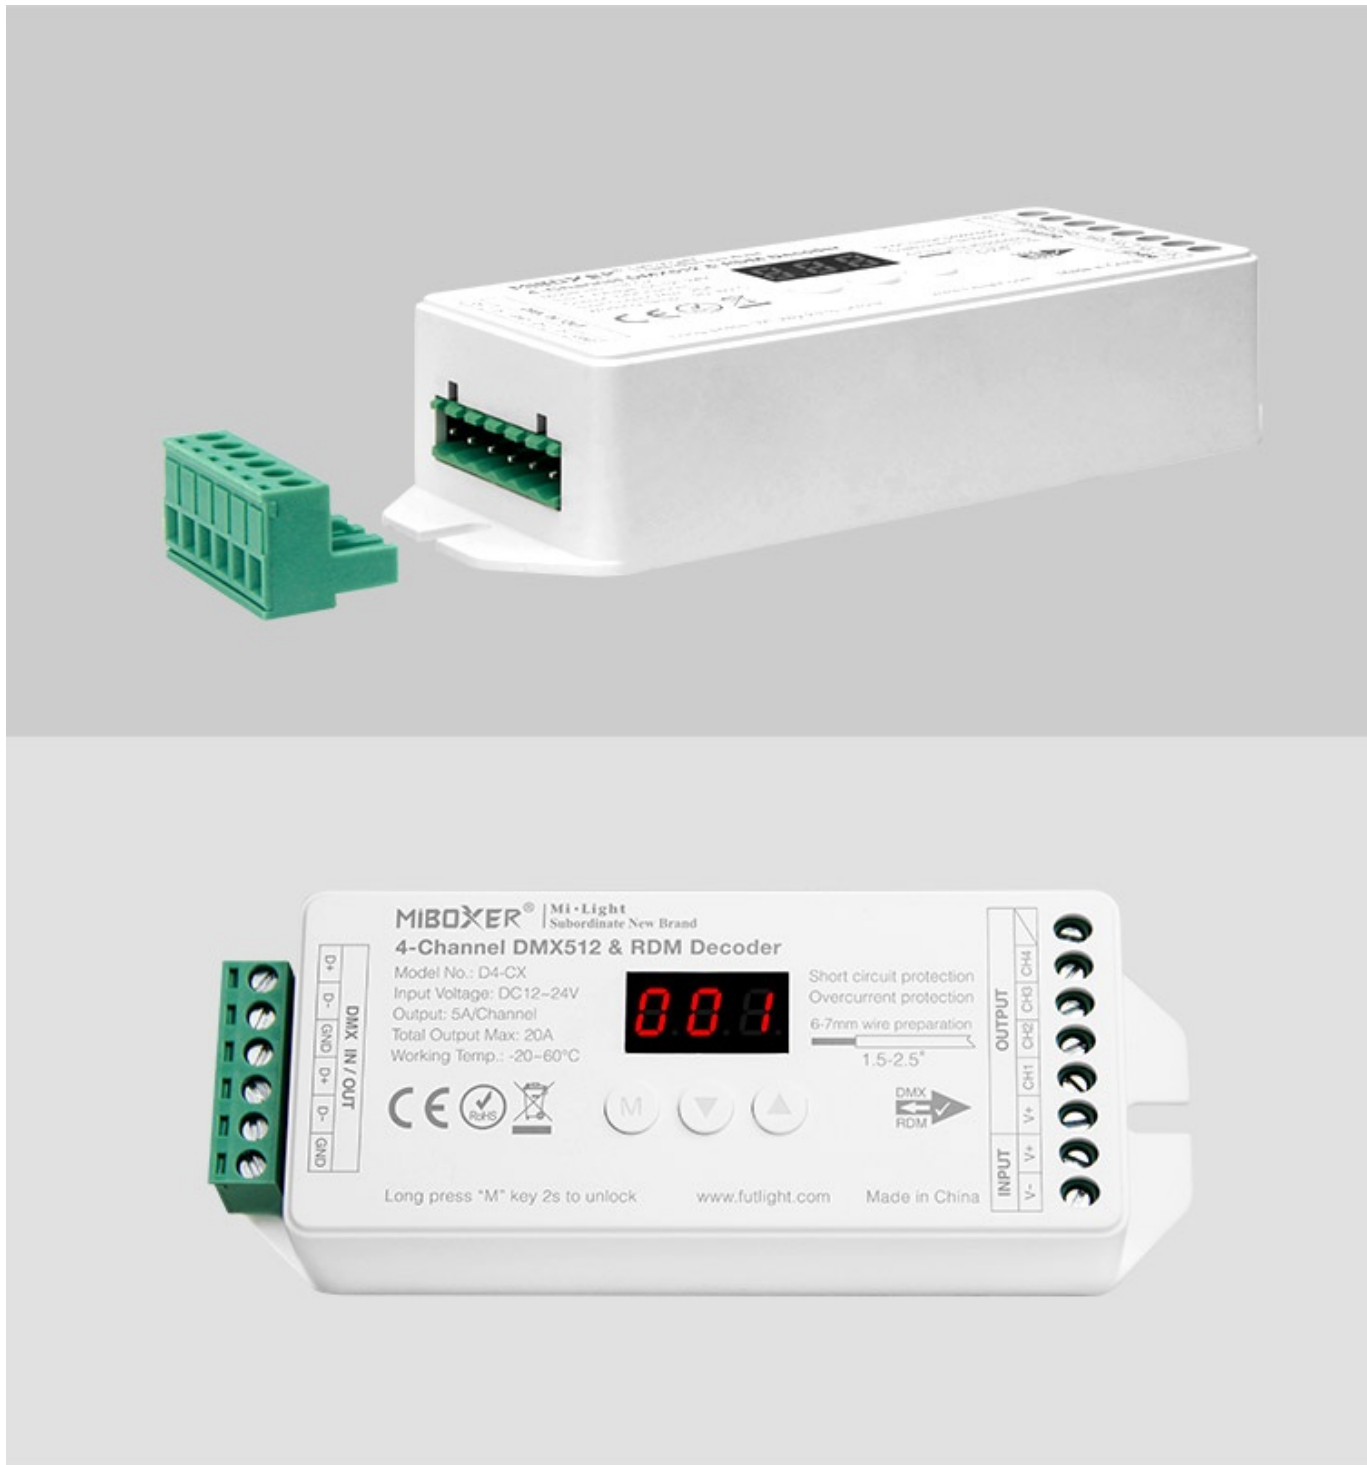



## Packing Details

