

Odkaz na výrobek: <https://osvetleni-schodiste-led.cz/futl03-milight-20w-rgbccct-strope-svete-panel-p-2656.html>

FUTL03 - MILIGHT - 20W RGB+CCT stropní světelný panel

Cena	2 085.77 Kč
Dostupnost	Dostupný
Doba zásilky	14 dnů
Katalogové číslo	2656
Výrobce	Mi.Light

Popis výrobku

Název produktu: 20W RGB+CCT Panel Light
Číslo modelu: FUTL03
Vstup: AC100~240V 50/60Hz
Jmenovitý výkon: 20W
Pracovní teplota: -20~60°C
Teplota barev: 2700~6500K
Světelný tok: 1400lm
Světelný výkon: 70lm/W
CRI: >80
UGR: <19
Životnost: 50000h
Úhel paprsku: 160°
Dosah dálkového ovládání: 30m

20W RGB+CCT Panel Light

Auto-transmitting function / Auto-synchronization function



2.4G Remote
control



Smart phone
APP control



16 million
colors change



CCT
Adjustable



Dimmable
Saturation control

2.4GHz remote control Smartphone APP control

Wireless remote and smartphone control, realize the multi-functional setting
(*Need WiFi iBox or 2.4GHz Gateway for smartphone App control)



Compatible with



Support Third Party Voice Control

It need 2.4GHz gateway for third party voice control



16 million colors | Saturation control

16 millions color change and color saturation control,
easily make the light atmosphere you want



Brightness adjustable Color temperature adjustable

Brightness adjustable, Adjust the color temperature from 2700-6500K,
make the light you want




2700K

6500K


Auto-transmitting function

One panel light can transmit the signals from the remote control to another panel light within 30m, as long as there is a panel light within 30m, the remote control distance can be limitless.

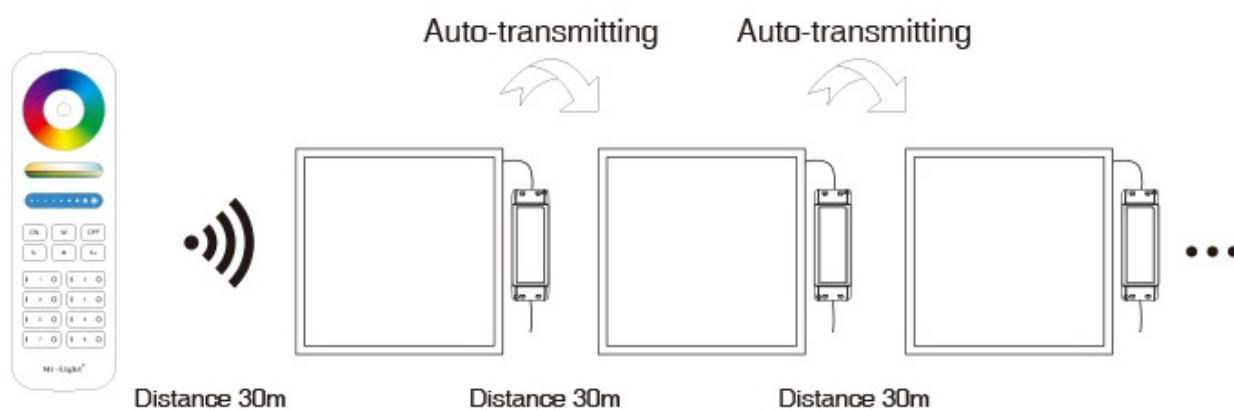


Auto-synchronization function

Different panel light can work synchronously when they are started at different times, controlled by the same remote, under same dynamic mode and with same speed, and within 30m distance.

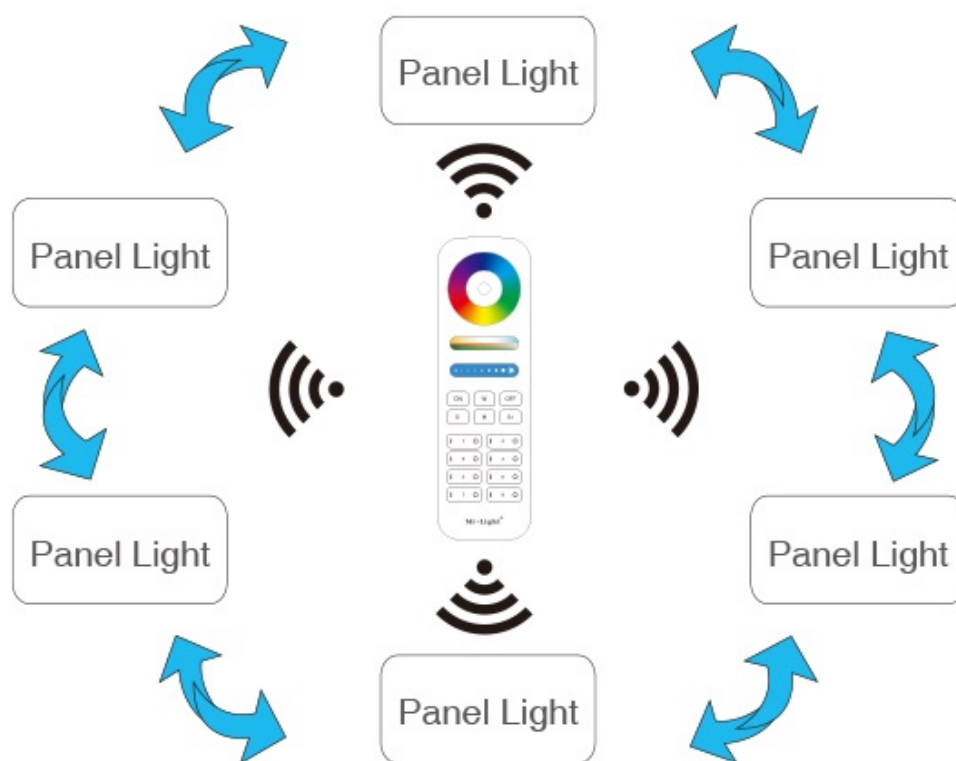

Fully Sealed design, ultra-thin frame

Fully sealed design; damp proof and anti-mosquito

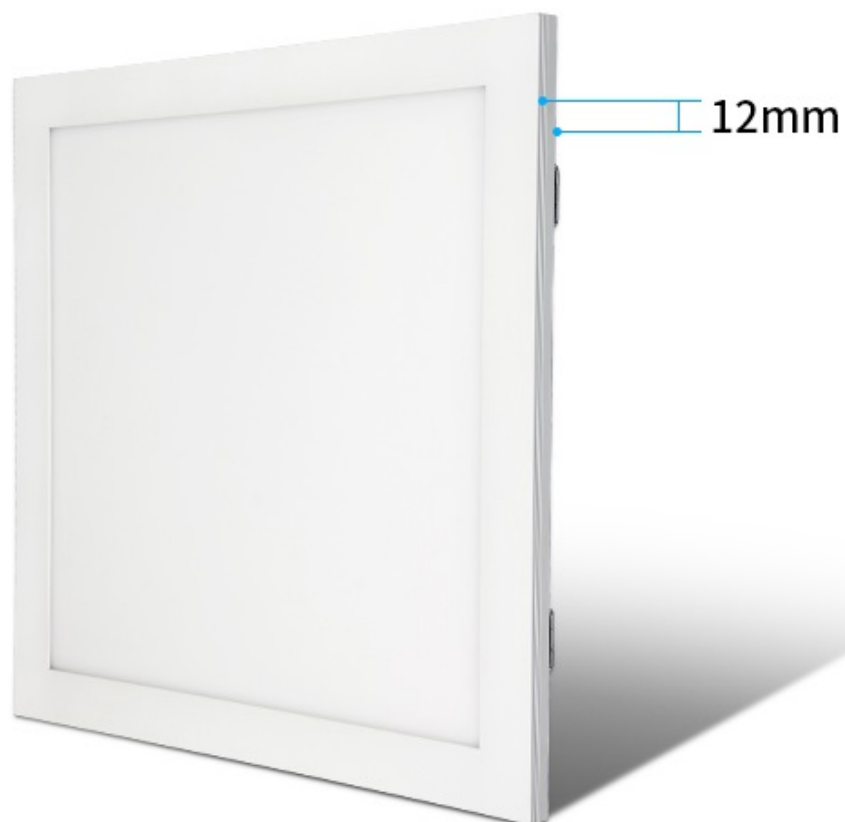



Aluminum alloy frame

Damp proof and rust-proof; Heat resistant;
Durable in use

