

Odkaz na výrobek: <https://osvetleni-schodiste-led.cz/sys-rd1-milight-5w-rgbccct-led-podzemn-svtlo-ip68-p-2315.html>

MILIGHT 5W RGB+CCT LED



SYS-RD1 - MILIGHT - 5W RGB+CCT LED Podzemní světlo IP68

Cena	1 988.35 Kč
Dostupnost	Dostupný
Doba zásilky	14 dnů
Katalogové číslo	2315
Výrobce	Mi.Light

Popis výrobku

Název produktu: 5W RGB+CCT LED Underground Light (Subordinal Lamp)

Číslo modelu: SYS-RD1

Vstupní napětí: DC24V

Výkon: 5W

Pracovní teplota: -20~60°C

Teplota barev: 2700~6500K

Světelný tok: 350lm

Světelný výkon: 70lm/W

CRI: >80

Životnost: 50000h

Úhel paprsku: 30°

IP míra: IP68

RGB+CCT LED Underground Light (Subordinate Lamp)

Connecting the "SYS-T1 Controller" or "SYS-PT1 Controller Box" to fulfill the wireless remote control; 16 million color change, color temperature, brightness and saturation adjustable randomly



16 million
colors change



CCT
Adjustable



Dimmable
Saturation control



IP68
waterproof rate

This product has to be connected to
"SYS-T1 Controller" or "SYS-PT1 Controller Box"
to fulfill the remote controlling



Smart lifestyle with beauty

16 million colors change, saturation adjustable

Make smart lighting atmosphere meet all your requirement



Brightness adjustable & Color temperature adjustable

Brightness adjustable, Adjust the color temperature from 2700-6500K,
make the light you want



IP68 Many steps waterproofing; waterproof rate IP68

Silicone rubber sealing make sure the excellent
waterproofness and safety usage



Stainless steel surface ring

High quality stainless steel materials;
not easy to fade and sunproof




High lumen LED Chips

High lumen LED chips; Low power
consumption and luminance decrease;
Bright color and high brightness



Stalinite mask

Made of high quality stalinite, High hardness, nonbreakable and high light-transmittance

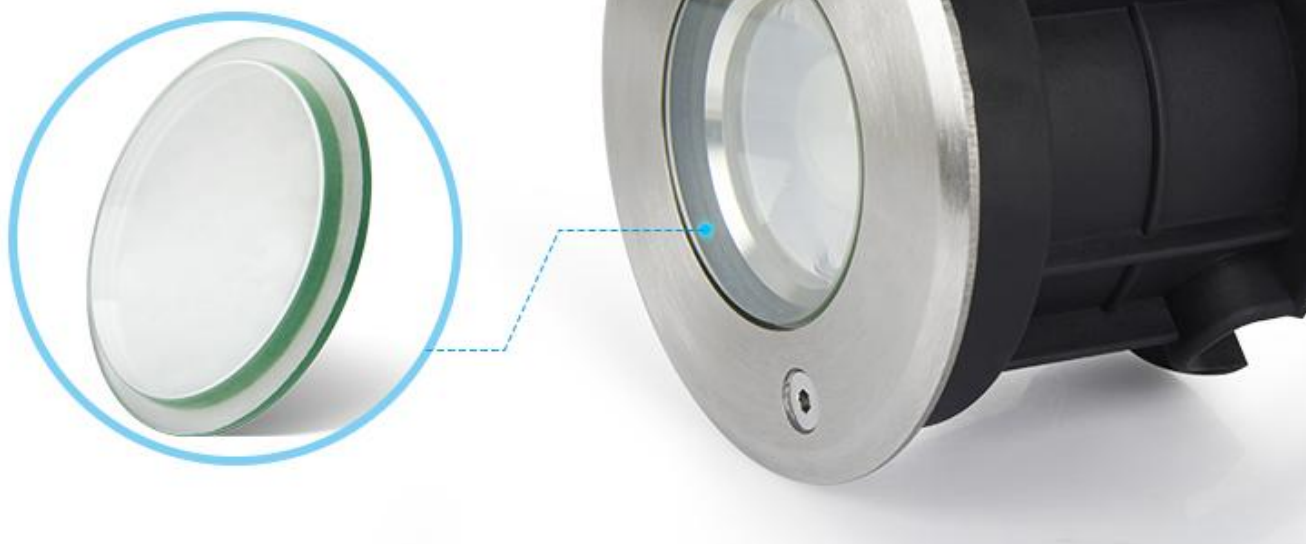

Optical Lens

Anti-dazzling optical lens; diverging light scientifically. Symmetrical and bright light ray



End cap screw

Stainless steel material,
Waterproof and dustproof



PC built-in fitting

Pressure and corrosion resistance,
not easy to deformation; easy installation



Integrated convection heat dissipation

Convection design, better heat dissipation, safe and stable



Product accessories


Note: this pack products not include accessories,
Please purchase separately if you require it



mini T 3-channel and 3-core waterproof connector(IP68)

Connection Diagram

Note: The "SYS-T1 Controller and SYS-PT1 Controller Box" has to be purchased separately.

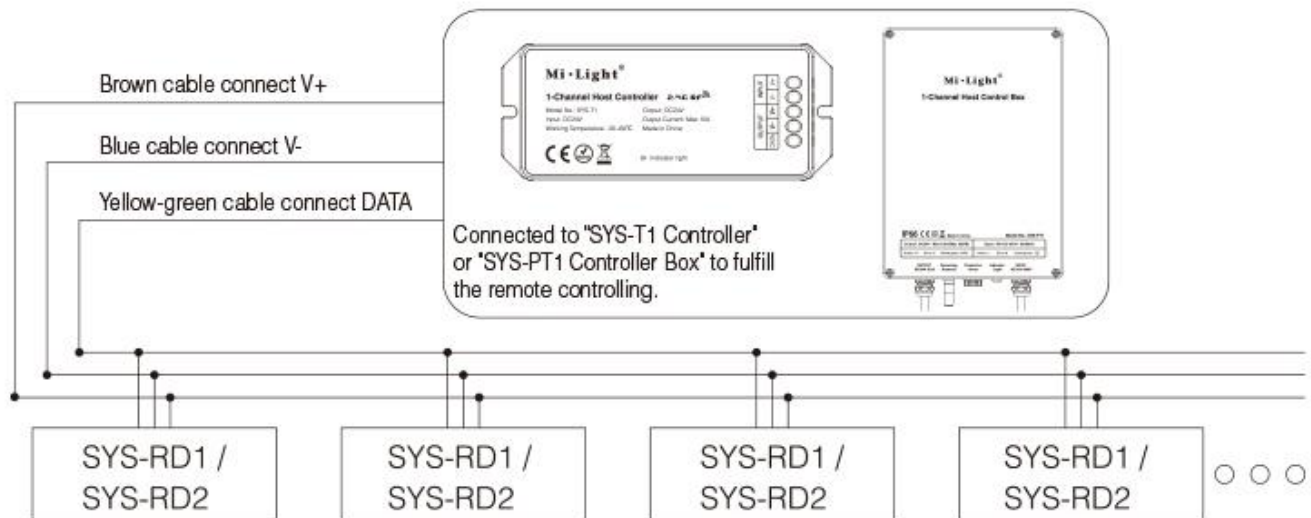

Note: When using "SYS-T1 controller or SYS-PT1 controller box", you need to add 'SYS-T2 1-channel signal amplifier or SYS-PT2 1-channel amplifier box' for below 3 situations.

1. Connecting over 50pcs lights.
2. Connected cable length over 300m.
3. Output power over (SYS-T1: 360W) / (SYS-PT1: 220W).

