

Odkaz na výrobek: <https://osvetleni-schodiste-led.cz/sys-rw1-milight-underwater-light-12w-rgbcct-p-2310.html>

SYS-RW1 - MILIGHT - Underwater Light 12W RGB+CCT

Cena	3 650.85 Kč
------	--------------------

Dostupnost	Dostupný
------------	-----------------

Doba zásilky	14 dnů
--------------	---------------

Katalogové číslo	2310
------------------	-------------

Výrobce	Mi.Light
---------	-----------------

Popis výrobku

Product Name: RGB+CCT LED Underwater Light
(Subordinate Lamp)

Model No.: SYS-RW1

Input Voltage: DC24V

Power: 12W

Working Temperature: -20~60°C

Color temperature: 2700~6500K

Luminous Flux: 1000LM

Light Efficiency: 85LM/W

CRI: >80

Lifespan: 50000h

Beam Angle: 160°

IP Rate: IP68

Housing Material: Stainless Steel+PC

RGB+CCT LED Underwater Light (Subordinate Lamp)

Connecting the controller(SYS-T1) to fulfill the wireless remote control;
16million color change, color temperature, brightness
and saturation adjustable randomly



16 million
colors change



CCT
Adjustable



Dimmable
Saturation control



IP68
waterproof rate

Connecting the controller(SYS-T1) to fulfill
the wireless remote control



16 million colors and saturation control



Color temperature and brightness adjustable randomly

Color temperature and brightness adjustable making many kinds of lighting atmosphere



2700K



6500K

IP68 Many steps waterproofing; waterproof rate IP68

Silicone rubber sealing and resin potting inside make sure
the excellent waterproofness and safety usage



Stalinite housing

High quality stainless steel materials;
not easy to fade and sunproof





High quality PC cover


Strong hardness, high lighting transmitting rate; Wide illumination distance

High lumen LED Chips

High lumen LED chips; Low power consumption and luminance decrease; Bright color and high brightness

Built-up designing

High quality stainless steel materials; Built-up designing; Easy-installation

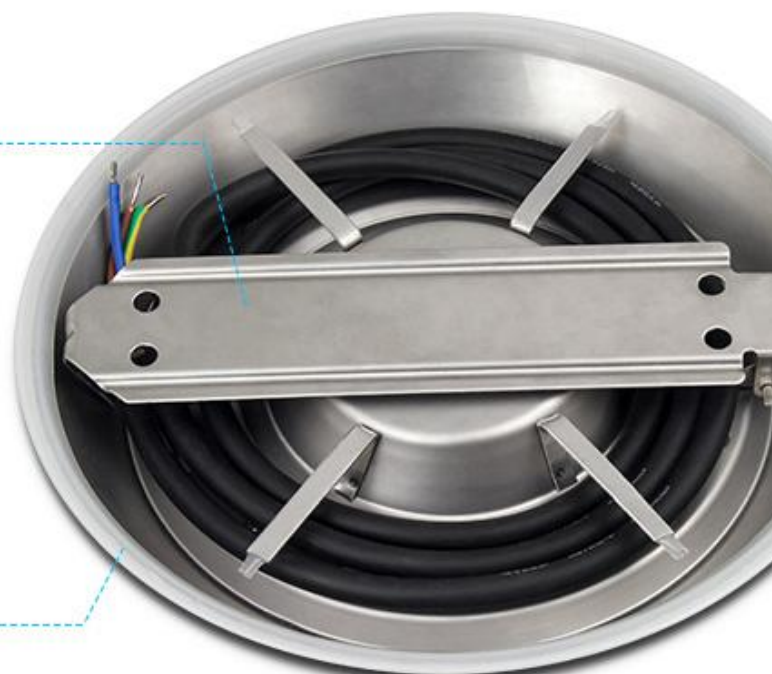

Silicone rubber sealing ring

Fully waterproofness make sure the lighting lifespan

Product accessories

Note: this pack products not include accessories, Please purchase separately if you require it



X 4-channel and 3-core waterproof connector(IP68)



T 3-channel and 3-core waterproof connector(IP68)



Straight 3-core waterproof connector(IP68)




3-core waterproof female connector(IP68)



3-core waterproof male connector(IP68)

Connection Diagram

Note: The "SYS-T1 Controller" has to be purchased separately

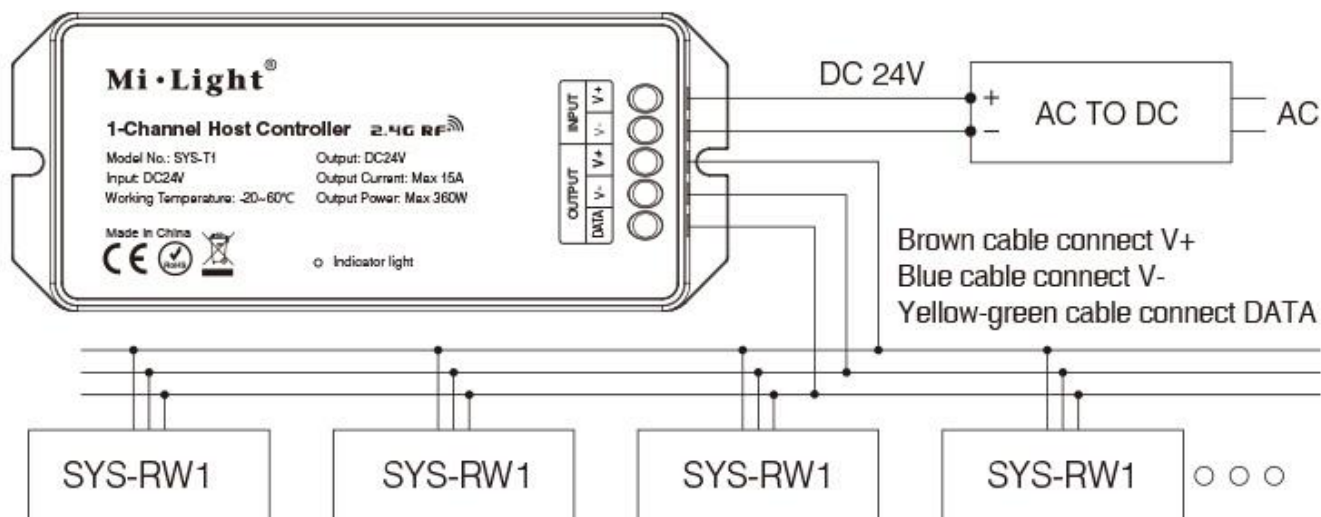

Note: When using "SYS-T1 controller", you need to add "SYS-T2 1-channel signal amplifier" for below 3 situations.

1. Connecting over 50pcs lights.
2. Connected cable length over 300m.
3. Output power over 360W.

All connected lights to "SYS-T1 Controller" cannot be over 360W, otherwise, it will damage the controller.

Application

