

Odkaz na výrobek: <https://osvetleni-schodiste-led.cz/tri-c1-ac-triac-rf-stisknte-dimmer-miboxer-p-2929.html>

TRI-C1 - AC Triac RF + Stiskněte Dimmer MiBoxer

Cena	629.82 Kč
Dostupnost	Dostupný
Doba zásilky	48 hodin
Katalogové číslo	2929
Výrobce	Mi.Light

Popis výrobku

Název produktu: AC Triac RF+Stiskněte Dimmer
Číslo modelu: TRI-C1
Vstupní napětí: AC100~240V 50/60Hz
Výstupní napětí: AC100~240V
Výstupní proud: Max 1,36A
Výstupní výkon: 150W @110V □ 300W@220V
Metoda ztlumení: RF bezdrátové stmívání, Push stmívání
Ovládací vzdálenost: 30m
Pracovní teplota: -10~40°C

AC Triac RF+Push Dimmer

2.4G RF Remote dimmer | Push dimmer | Brightness stepless dimming

Trailing edge(ELV) phase-cut | Set up min brightness

Controlled single color Triac dimmer led light, traditional filament lamp and halogen lamp



Making traditional lighting lamp intelligent

The following lamps can be controlled, so that traditional lamps have intelligent functions

The connected lamp input voltage is 110V, power do not exceed 150W;
input voltage is 220V, power do not exceed 300W;




Small size and easy to install

It can be put into European/America standard junction box, convenient to wire and easy to install




Connection Diagram

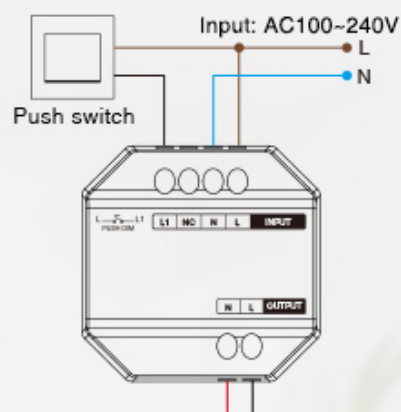

Silicon Controlled single color Triac dimmer led light, traditional filament lamp and halogen lamp

Installation Diagram

Supports standard bottom boxes with depth above 50mm



Brightness stepless dimming

0~100% stepless dimming, without any screen flickering



Push switch

Support Push dimmable
One click: turn on/off lights
Long press: increase /decrease brightness
(Long press and release, then long press to change)

Set up min brightness

Set the minimum brightness value by remote, it can set all the minimum brightness of all connecting dimmer one time



2.4GHz RF Remote Controllable

Link and unlink is easy to operate within 30m control distance



FUT006



FUT007



B1 / T1



B2 / T2



K1



FUT087



WL-Box1

Compatible with


Remote controller
purchased separately

Support Smartphone APP control and third party voice control

It need 2.4GHz gateway for smartphone control or third party voice control



Trailing edge(ELV) phase-cut technology

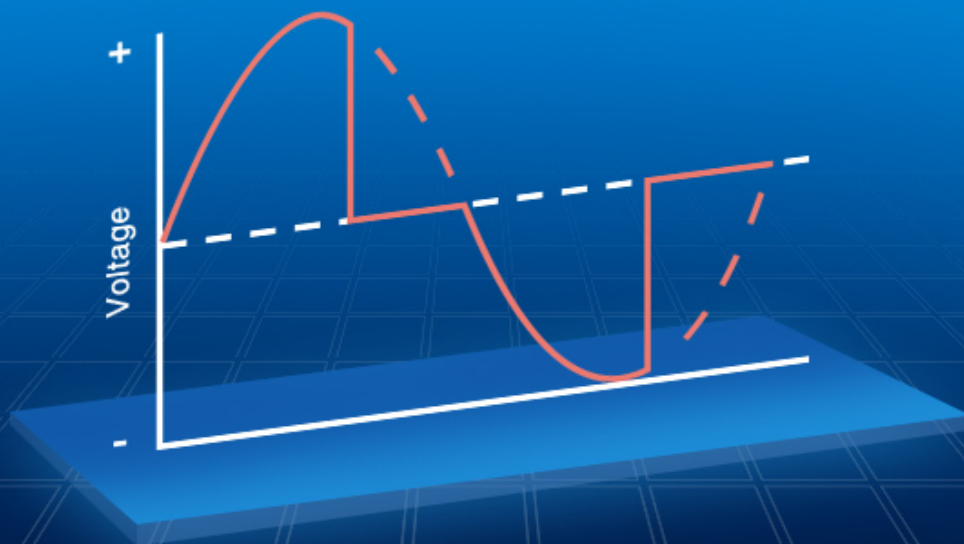

Over heat / load protection

Have switch to test temperature and over heat / load protection



Lamp interface

Can be controlled single color Triac dimmable led light, traditional filament lamp and halogen lamp

